
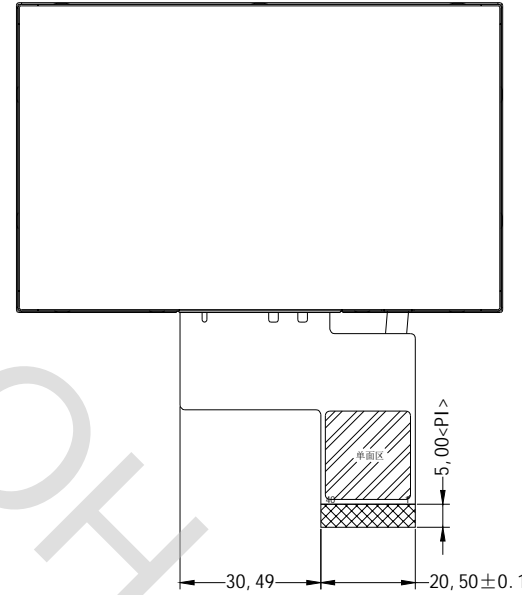
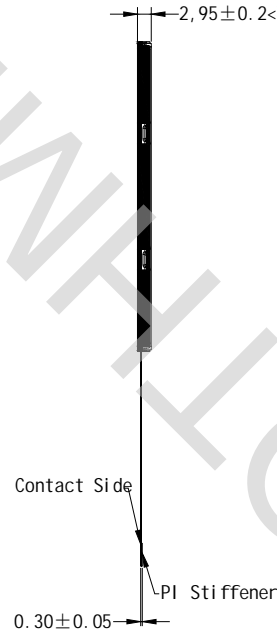



*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

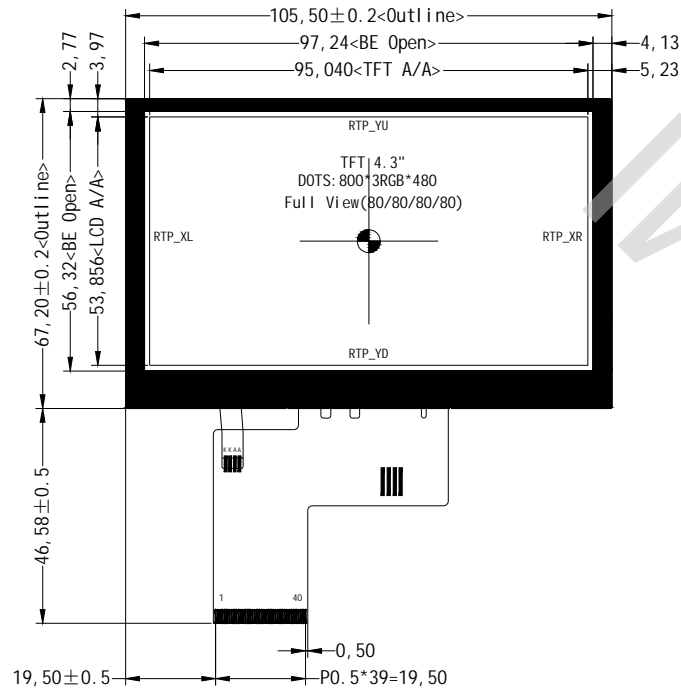

Pin_SIGNAL		Pin_SIGNAL	
1	NC	21	D3P
2	VCI	22	GND
3	VCI	23	NC
4	NC	24	NC
5	RESX	25	GND
6	STBYB	26	NC
7	GND	27	NC
8	DON	28	NC
9	DOP	29	NC
10	GND	30	GND
11	D1N	31	LED_K
12	D1P	32	LED_K
13	GND	33	L/R
14	D2N	34	U/D
15	D2P	35	NC
16	GND	36	NC
17	DCKN	37	NC
18	DCKP	38	NC
19	GND	39	LED_A
20	D3N	40	LED_A

LVDS data format	R4: JEIDA Mode (Default)
	R3: VESA Mode
LVDS Lanes	R2: 4 Lane (Default)
	R1: 3 Lane

*1. LCD Display Type	TFT, Transmissive, Normally Black		
*2. Viewing Direction	Full View(U80/D80/R80/L80)	*6. Storage Temp	-30° C-85° C
*3. Interface	LVDS 3L/4L	*7. Driver IC	ST7262
*4. Operating Voltage	VCI=3.3V (Typ)	*8. Backlight	WHITE VF=16.0V If=40mA(Typ)
*5. Operating Temp	-30° C-85° C	*9. LCM Brightness	600 cd/m ² (Typ)

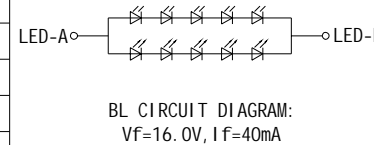

Dwg Title: TFT-H043A13SVIST6N40			
Scale: 1:1	Unit: MM	Tol: ±0.3	
Ver: V0	Drawn: Li u. YL	Date: 2020-04-26	