
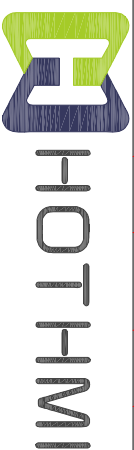
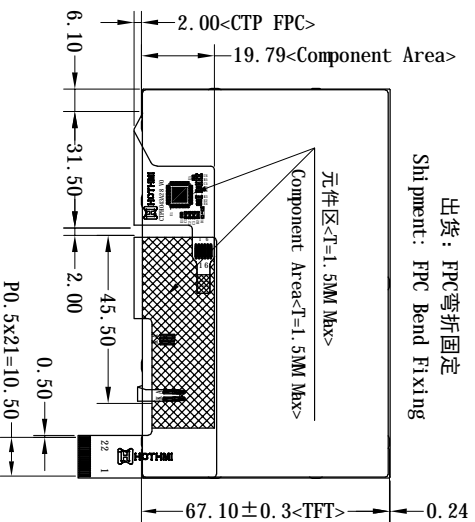
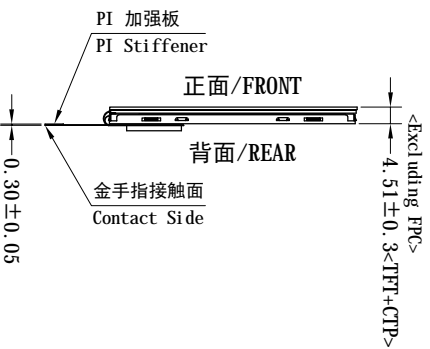


\*\*\*为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于2分钟或者更短的时间内刷新显示内容一次或多次。  
 \*\*\*In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.  
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

图纸字体：黑体  
 Drawing Font: Bold

LVDS CN Pin\_SIGNAL

Pin	Signal	Pin	Signal
1	LEDK	21	CTP-RTN
2	LEDA	22	GND
3	DB0		
4	DB1		
5	DB2		
6	DB3		
7	DB4		
8	DB5		
9	DB6		
10	DB7		
11	TE		
12	RESX		
13	WBX		
14	RDX		
15	CSX		
16	DCX		
17	VCI		
18	CTP-INT		
19	CTP-SDA		
20	CTP-SCL		

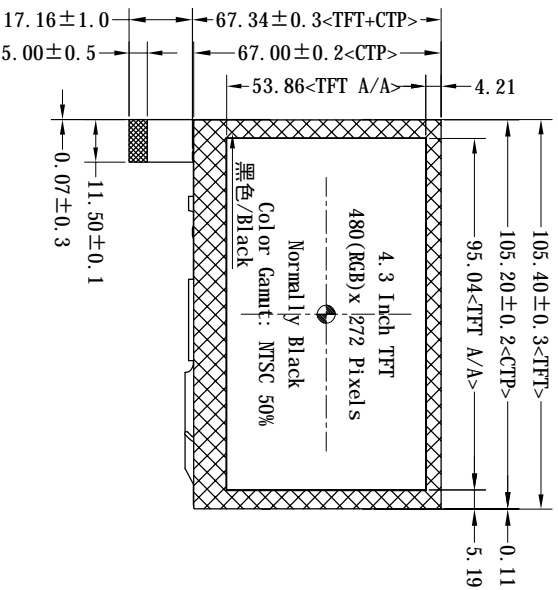

产品型号 TFT-H043B29WQIST8C22

Product model	Design	Date
比例 1:1	Li u. YL	2025-03-24
版本 V0-1	单位 MM	公差 ±0.3

Viewing Direction	U85/DB85/R85/L85(Typ.)	TFT 工作温度	-30 °C ~ +80 °C
接口 Interface	8-bit parallel	TFT 储存温度 <th>-30 °C ~ +85 °C</th>	-30 °C ~ +85 °C
工作电压 Operating Voltage	VCI=3.0~3.3V, VDD=3.0~3.3V	TFT 存储条件	VF=12.0±1.0V, IF=80mA
TFT 工作温度	MV3041<TFT>, GT911<CTP>	液晶模组亮度 LCM Brightness	800 cd/m <sup>2</sup> (Typ.) / 恒流测试