



正视图
Front view

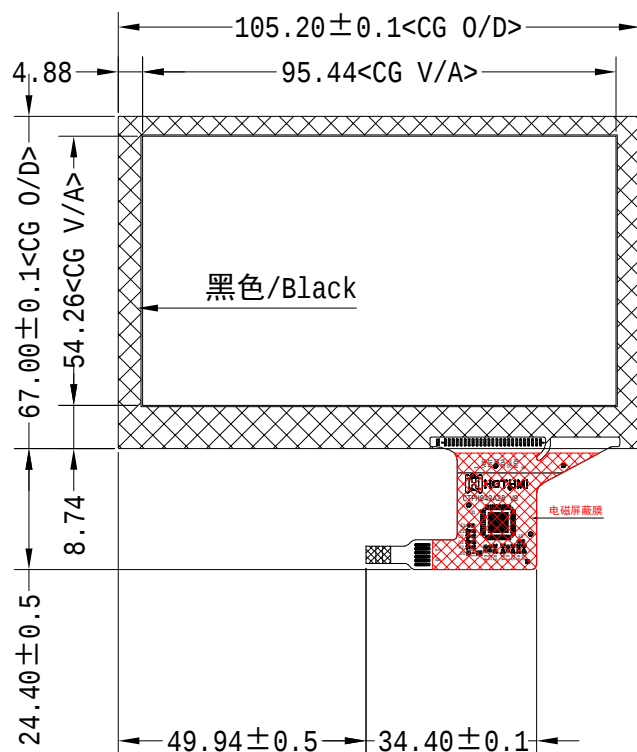

侧视图
Side view

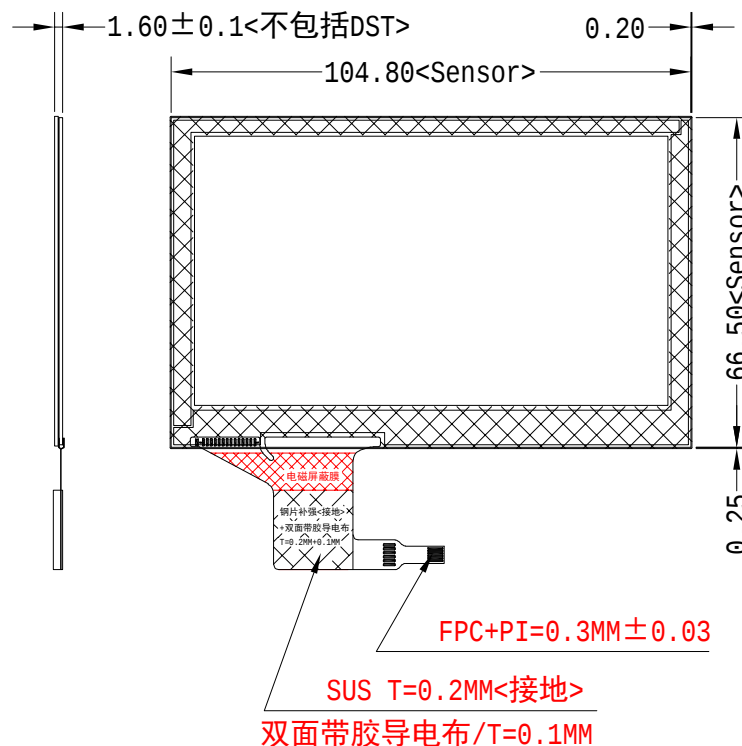

背视图
Back view

6Pin_SIGNAL	
1	VDD
2	INT
3	GND
4	SDA
5	SCL
6	RTN

触摸构成 Touch constitute	Glass+Glass/总厚度: $1.6 \pm 0.1mm$ (不含背胶)		
联接方式 Connection method	FFC/6P/0.5MM间距	表面硬度 Surface hardness	6H
接口 Interface	IIC	驱动芯片 Driver IC	GT911
工作电压 Operating Voltage	VDD=3.3V, IOVDD=3.3V(Typ)	CTP 工作环境 CTP working environment	$-20^{\circ}C \sim 70^{\circ}C$, $\leq 90\%RH$
透光率 Transmittance	$\geq 85\%$	CTP 储存环境 CTP Storage environment	$-30^{\circ}C \sim 80^{\circ}C$, $\leq 90\%RH$



产品型号 Product model	CTP-H043A28		
比例 Scale	1:1	设计制图 Design	Liu.YL
版本 Ver	V0	单位 Unit	MM
		公差 Tol.	± 0.2